

Lulo Kimberlite Exploration Update


- MIC committee meeting to approve Lucapa's majority stake postponed to late October
- Five new priority kimberlites identified to be bulk sampled
- 48 samples from 26 kimberlites have been processed in two years since the Kimberlite Bulk Sampling Plant was commissioned, exceeding the original plan

Lucapa Diamond Company Limited (ASX:LOM) ("Lucapa") provides an update to the Project Lulo JV Minerals Investment Contract ("MIC") process and Kimberlite Bulk Sampling Exploration Program.

Minerals Investment Contract

As previously announced to the ASX on 24 June, 2024 ("Committee meets to progress Lulo Kimberlite Exploration JV") the committee tasked with verifying the terms of the new Lulo Kimberlite Exploration Joint Venture MIC met in Luanda in June and August. The third meeting, which was scheduled for September, has been postponed, and new dates have been proposed for late October. Lucapa's interest in the Joint Venture will be increased from the current 39 percent to a majority stake.

Lucapa CEO and MD Nick Selby said, "All required documents for the new MIC have been completed ahead of the next meeting. Although the 90 day deadline has passed, we are confident that the new MIC will be finalised soon. In the meantime, the results from the latest kimberlite bulk sampling supports our perspective that only a few kimberlites are the source of the mined alluvial diamonds, and that the fewer of those that there are, the higher they are likely to be in diamond content. We are planning to process five priority targets in the southern area of the concession during the remainder of the dry season, before they become submerged and inaccessible once the wet season commences."

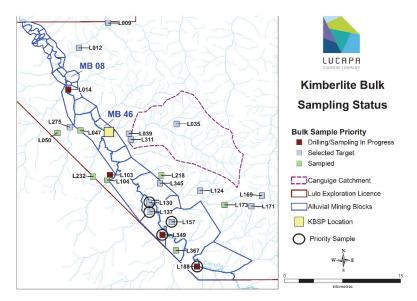

Lucapa Diamond Company Limited abn 44 111 501 663 | 34 Bagot Road | Subiaco 6008 | Western Australia PO Box 1091 | West Perth WA 6872 | T +61 8 9381 5995 | F +61 8 9380 9314 | general@lucapa.com.au



Kimberlite Bulk Sampling Program


During the quarter ending 30 September 2024 ("Q3"), six samples were processed through the Kimberlite Bulk Sampling Plant ("KBSP"), with no diamonds recovered.

However, this reinforces the stance that the diamonds being recovered from the alluvials, were sourced from relatively few kimberlites. Therefore, increasing the prospectivity and likely diamond content of those diamond bearing kimberlites.

A second sample will be excavated from L014 when alluvial mining commences in that area after the upcoming wet season. The second sample will be taken from a separate lobe of the kimberlite to the first L014 sample taken.


Sample ID	Volume Processed m ³	Diamonds recovered	Total carats
L014/01	2,184	0	0
L047/01	1,061	0	0
L367/01	529	0	0
L367/02	927	0	0
L218/01	1,322	0	0
L218/02	1,253	0	0

All the technical information gained from each subsequent sample is used to improve and further refine the prioritisation methodology. The five high priority kimberlite targets to be processed next are:

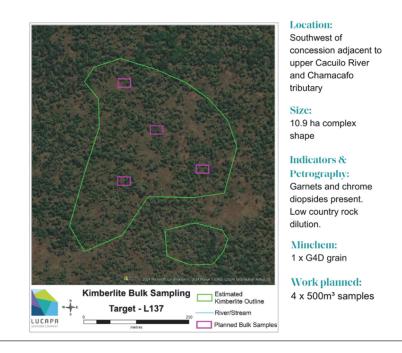







Location:

Southwest of concession adjacent to upper Cacuilo River


Size: 9.5 ha

Indicators &

Petrography: Garnet, chromite, ilmenite and chrome diopsides present. Very low country rock dilution.

Minchem: 2 x majoritic garnets. High pressure chrome diopsides present.

Work planned: 4 x 500m³ samples



Location: Southwest of concession adjacent to upper Cacuilo River

Size: 7.4 ha

Indicators &

Petrography: Mostly chrome diopsides with some garnets. Low country rock dilution.


Minchem:

High pressure chrome diopside grains and Lherzolite garnets

Work planned: 4 x 500m³ samples



10 October 2024



Location: Southern part of concession just east of Cacuilo River

Size: 7.3 ha

Indicators &

Petrography: Common garnet and chrome diopsides. Low country rock dilution.

Minchem:

Megacryst garnets and high interest chrome diopsides

Work planned: 2 x 1000m³ samples



Location:

Far south of concession adjacent to upper Cacuilo River

Size:

5.7 ha plus adjacent pipe of 2.2 ha

Indicators & Petrography:

Mostly chrome diopsides with some garnets. Low country rock dilution in most holes.

Minchem:

Megacryst garnets and high interest chrome diopsides.

Work planned:

2 x 1000m³ samples in main pipe and one 750m³ sample in adjacent pipe

It is two years since the dedicated KBSP was commissioned with 48 samples processed from 26 kimberlites during that period. The processing rate has comfortably exceeded the original target set of two samples every six weeks.



10 October 2024

More than 1,200 kilometres of roads have been developed across the vast concession to reach alluvial and kimberlite exploration sites. This continuous improvement of the road network has resulted in safer and quicker access to sample sites.



Picture: Preparing to extract a kimberlite sample at L188 following overburden stripping

For and on behalf of the Lucapa Board.

Nick Selby Managing Director and CEO For more information:

Candice Sgroi Head of Investor Relations and Corporate Communications Mob: +61 400 49 22 85 | csgroi@lucapa.com.au

ABOUT LUCAPA

Lucapa is an ASX listed diamond miner and explorer with assets in Angola and Australia. It has an interest in the Lulo Diamond Mine in Angola which has been in commercial production since 2015, (conducted by Sociedade Mineira Do Lulo, Lda ("SML") Lucapa 40%, Endiama 32%, Rosas & Petalas 28%).

The large, high-value diamonds produced from Lulo attracts the highest prices per carat for alluvial diamonds globally.

Lucapa also has a 39% interest in the Lulo Kimberlite Exploration Joint-Venture (Endiama 51%, Rosas & Petalas 10%), which is exploring for the potential primary source kimberlites at the prolific Lulo concession in Angola.

In 2021, through its wholly owned subsidiary, Australian Natural Diamonds Pty Ltd, Lucapa completed the strategic and transformative acquisition of the Merlin Diamond Project, an historic Australian mine in the Northern Territory of Australia.



The Board, management and key stakeholders in Lucapa have deep global diamond industry experience and networks all through the value chain from exploration to retail.

Competent Person's Statement

Information included in this announcement that relates to exploration results and resource estimates is based on and fairly represents information and supporting documentation prepared and compiled by Richard Price MAusIMM who is a Member of the Australasian Institute of Mining and Metallurgy. Mr Price is an employee of Lucapa Diamond Company Limited. Mr Price has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting Exploration Results, Mineral Resources and Ore Reserves. Mr Price consents to the inclusion in the announcement of the matters based on this information in the form and context in which it appears.

No New Information

To the extent that this announcement contains references to prior exploration results, a production target and financial information derived from a production target and Mineral Resource estimates, which have been cross referenced to previous market announcements made by the Company, unless explicitly stated, no new information is contained. The Company confirms that it is not aware of any new information or data that materially affects the information included in the relevant market announcements and, in the case of estimates of a production target and financial information derived from a production target and Mineral Resources that all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed.

Forward-Looking Statements

This announcement has been prepared by the Company. This document contains background information about the Company and its related entities current at the date of this announcement. This is in summary form and does not purport to be all inclusive or complete. Recipients should conduct their own investigations and perform their own analysis in order to satisfy themselves as to the accuracy and completeness of the information, statements and opinions contained in this announcement.

This announcement is for information purposes only. Neither this document nor the information contained in it constitutes an offer, invitation, solicitation or recommendation in relation to the purchase or sale of shares in any jurisdiction. This announcement may not be distributed in any jurisdiction except in accordance with the legal requirements applicable in such jurisdiction. Recipients should inform themselves of the restrictions that apply in their own jurisdiction. A failure to do so may result in a violation of securities laws in such jurisdiction.

This document does not constitute investment advice and has been prepared without taking into account the recipient's investment objectives, financial circumstances or particular needs and the opinions and recommendations in this representation are not intended to represent recommendations of particular investments to particular persons.

Recipients should seek professional advice when deciding if an investment is appropriate. All securities transactions involve risks, which include (among others) risks associated with mining, exploration, operations, resource, environment, funding and adverse or unanticipated market, financial, currency or political developments.



No responsibility for any errors or omissions from this document arising out of negligence or otherwise is accepted. This document does include forward-looking statements. Forward-looking statements are only predictions and are subject to risks, uncertainties and assumptions which are outside the control of the Company.

Actual values, results, outcomes or events may be materially different to those expressed or implied in this announcement. Given these uncertainties, recipients are cautioned not to place reliance on forward-looking statements. Any forward-looking statements in this announcement speak only at the date of issue of this announcement. Subject to any continuing obligations under applicable law and ASX Listing Rules, the Company does not undertake any obligation to update or revise any information.



10 October 2024

Appendix 1

Reporting of kimberlite exploration results for the Lulo Project

- JORC Code (2012) requirements -

Sampling Techniques and Data Criteria JORC Code Explanation Lucapa Commentary Nature and quality of sampling (e.g. cut channels, One bulk sample from each of kimberlites L014 random chips, or specific specialised industry and LO47 and two samples each from L367 and standard measurement tools appropriate to the L218 were collected from excavated pits. The minerals under investigation, such as down hole surface overburden was removed by excavator gamma sondes, or handheld XRF instruments, and ADT truck before all earthmoving equipment etc.) These examples should not be taken as was thoroughly cleaned. limiting the broad meaning of sampling. Each sample pit was then excavated into the • Include reference to measures taken to ensure clean kimberlite material and directly loaded into trucks for transport to a temporary stockpile area sample representivity and the appropriate calibration of any measurement tools or systems before being reloaded into Tatra trucks for transport to the plant stockpile area. The sample used. material was placed on a sterilised pad of sand Aspects of the determination of mineralisation before being fed into the plant by front-end that are Material to the Public Report. In cases Sampling where 'industry standard' work has been done this loader. techniques would be relatively simple (e.g. 'reverse circulation The sample locations were chosen following the drilling was used to obtain 1 m samples from drilling of diamond core holes and auger holes which 3 kg was pulverised to produce a 30 g and exploratory excavator pitting at each sample charge for fire assay'). In other cases more site. explanation may be required, such as where there • The objective of the samples was to is coarse gold that has inherent sampling demonstrate whether potentially economic problems. Unusual commodities or mineralisation quantities of diamonds might be present in the types (e.g. submarine nodules) may warrant kimberlite pipe and was not selected to be disclosure of detailed information. representative of the grade of the body as a whole. The samples were located over the kimberlite to allow representivity of the sampling program.



Drilling techniques	 Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face- sampling bit or other type, whether core is oriented and if so, by what method, etc.). 	 The drilling consisted of diamond core drilling and auger drilling. The drill core recovered was of HQ diameter. The original HQ discovery holes were drilled to 85.5m (L014), 57.6m (L047), 101.6 (L218) and 75.6m (L367). HQ delineation holes were drilled to approximately 30m deep and auger delineation holes were drilled to approximately 15m depth to define the bulk sample sites. All holes were drilled vertically. Core is recovered from the core barrel and stored in core boxes, before being transported by light vehicle to the core shed. Core recovery is generally high, though significant core losses are experienced through unconsolidated surface sediments to about 3m depth.
Drill sample recovery	 Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	 All core is visually and semi-quantitatively logged then photographed at the operation's core shed. All auger product is visually assessed for the presence of kimberlite at the drill site. The bulk sample pits were visually inspected to ensure no contamination of surface material entered the sample material.
Logging	 Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography. The total length and percentage of the relevant intersections logged. 	 No sub-sampling was undertaken, though additional sample pits were excavated where required to improve representivity of the sample. All samples are treated in their entirety.



Sub-sampling techniques and sample preparation	 If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all subsampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	 No sub-sampling was undertaken. All samples are treated in their entirety.
Quality of assay data and laboratory tests	 The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established. 	 The samples were treated through the Kimberlite Bulk Sample Plant ("KBSP"). The plant was thoroughly decontaminated before sample treatment commenced. A layer of sand was used on the sample pad, beneath the deposited sample, to prevent sample loss or contamination between the sample and the ROM pad.
Verification of sampling and assaying	 The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	 No verification of samples or twinning has been undertaken, due to the bulk nature of the sample.
Location of data points	 Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	 The original sample sites were initially located using a hand-held GPS with a nominal accuracy of about 5m. The final location was measured using a Trimble Real-Time differential GPS system with an accuracy of <5cm. Sample volumes were measured using drone imagery. Volume fed to the plant was based on bucket factors and load counts. The grid system is WGS84 Zone 34L.



Data spacing and distribution	 Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	 The sample positions and size were selected on the basis of giving the best likelihood of recovering diamonds and were not intended to return a grade representative of the pipe as a whole. However, the distribution of sampling pits over the surface of the body improves representivity particularly on larger bodies.
Orientation of data in relation to geological structure	 Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	• The sample is considered a bulk sample within the pipe. Orientation of the sample is not considered significant and is not expected to introduce bias.
Sample security	• The measures taken to ensure sample security.	• Security of the sampling and sample storage areas, processing and diamond recovery was continuously monitored by company and Angolan State Diamond Security personnel.
Audits or reviews	 The results of any audits or reviews of sampling techniques and data. 	 The sampling techniques are industry standard, and no audits or reviews have been undertaken to validate the information presented at this stage.

Reporting of Exploration Results

Criteria	JORC Code Explanation	Lucapa Commentary
Mineral tenement and land tenure status	 Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	 The legislation covering the Angolan diamond industry stipulated that only Endiama (Empresa Nacional de Diamantes de Angola, the State Diamond Company) or joint ventures with Endiama (the Angolan State diamond mining company), can hold diamond mining rights. Under the terms of the two Lulo agreements, separate titles are granted for alluvial (secondary) and kimberlite (primary) exploration and/ or mining. Following successful alluvial exploration, a 10- year alluvial Mining Investment Contract was signed in July 2015 creating "Sociedade Mineira Do Lulo, LDA.", an Angolan incorporated company in which Lucapa Diamond Company Ltd has a 40% shareholding, Endiama 32% and Rosas & Petalas S.A. 28%. This Angolan entity



		 was officially incorporated in May 2016. Following a renewal application for kimberlite exploration, a 5-year Mineral Investment Contract ("MIC") was signed and gazetted in May 2019, expired on 2 May 2024. Interests held in this exploration venture are Endiama 51%, Lucapa Diamond Company Ltd 39%* and Rosas & Petalas S.A. 10% (*interest will be reduced to 30% after recoupment of the exploration and mining development investments). A one-year extension has been applied for. A new MIC is also in the final stages of being ratified. As previously announced to the ASX ("Update on Lulo MIC" 24 June, 2024) the committee tasked with verifying the terms of the new Lulo Kimberlite Joint Venture Minerals Investment Contract met in Luanda in June. It is proposed for Lucapa to receive a majority stake of the Joint Venture from its current 39 percent.
Exploration done by other parties	• Acknowledgment and appraisal of exploration by other parties.	 Limited exploration has been undertaken by state-controlled entities and joint ventures Diamang and Condiama. Parts of the area have been exploited by artisanal miners – no records of this work are available.
Geology	• Deposit type, geological setting and style of mineralisation.	 Significant diamond bearing alluvial systems, of Mesozoic to Recent ages overlie a major, but relatively poorly explored, kimberlite field. The kimberlite pipes intrude flat-lying Permian sediments within the Lucapa Graben. The kimberlite field is believed to be the source of the alluvial diamonds.
Drill hole Information	 A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: easting and northing of the drill hole collar elevation or RL (Reduced Level - elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	 No drill hole information is presented here as it is not relevant to the sampling process other than to guide location of the sample.



Data aggregation methods	 In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	 No weighting, averaging, grade truncations or cut-off grades have been used. No short or long length aggregation is applicable. No metal equivalent values are used.
Relationship between mineralisation widths and intercept lengths	 These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known'). 	 The deposits may be regarded as massive deposits so sample orientation is not relevant.
Diagrams	• Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	• Appropriate map and plans for the reported mineralisation with scale and north points are included with the text of the report.
Balanced reporting	• Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	Results are complete for all samples reported.
Other substantive exploration data	 Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	 The samples were recovered from L014, L047, L218 and L367, kimberlite pipes identified during drilling on the licence area in 2017, 2018 and 2022.



Further work	 The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	 Bulk sampling of the remaining high interest kimberlites in the Cacuilo catchment will continue. Drilling will continue on the priority targets identified to locate material suitable for bulk sampling. Drilling on additional magnetic targets will continue to identify new kimberlites and assess whether they should be bulk sampled. Additional Phase 2 sampling will be undertaken on the kimberlites with the highest diamond recoveries.

Section 3 (Resources) Does Not Apply To This Announcement Section 4 (Reserves) Does Not Apply To This Announcement

JORC Code (2012) requirements -

Estimation and Reporting of Diamonds and Other Gemstones

Criteria	JORC Code Explanation	Lucapa Commentary
Indicator minerals	 Reports of indicator minerals, such as chemically/physically distinctive garnet, ilmenite, chrome spinel and chrome diopside, should be prepared by a suitably qualified laboratory. 	 No indicator minerals were recovered from these samples.
Source of diamonds	 Details of the form, shape, size and colour of the diamonds and the nature of the source of diamonds (primary or secondary) including the rock type and geological environment. 	 Diamonds have been recovered from kimberlite bulk samples.
Sample collection	 Type of sample, whether outcrop, boulders, drill core, reverse circulation drill cuttings, gravel, stream sediment or soil, and purpose (e.g. large diameter drilling to establish stones per unit of volume or bulk samples to establish stone size distribution). Sample size, distribution and representivity. 	 Overburden of approximately 2m-8m thick overlaying the kimberlites was removed using a Volvo 480 excavator and Volvo ADT trucks. The sample pits were excavated and material from the pits transported to a prepared sample pad made up of laterite, near to a prepared road before being reloaded onto Tatra trucks to be transported to the ROM stockpile close to the KBSP in preparation for processing.
Sample treatment	 Type of facility, treatment rate, and accreditation. Sample size reduction. Bottom screen size, top screen size and re-crush. Processes (dense media separation, grease, X-ray, hand-sorting, etc.). Process efficiency, tailings auditing and granulometry. Laboratory used type of process for micro diamonds and accreditation. 	• The samples were treated through the Kimberlite Bulk Sample Plant (KBSP). The KBSP is comprised of a front-end feed arrangement, followed by a scrubber and a double deck screen, which splits the material into coarse and fine streams. Coarse material (+18mm) is screened off and collected on an oversize stockpile. Fine material (>1.5mm) is processed through a DMS (dense media separation) unit, with DMS



			diamond r undertake concentra tailings st +18mm m fed throug secondary Material ru through th cut-point the DMS. produced oversize w The plant before sar	ecovery unit. Fin n by hand sortin tes. All -1.5mm n orage facility. aterial is stockpi gh crushing circui jaw crushers. Th crusher deposits emaining as over ne secondary crus of 18 mm, after v Due to the small by these samples vas suspended for was thoroughly of nple treatment of	rsize is recirculated sher until it passes the which it passes into amount of oversize s, crushing of the or these samples. decontaminated
Carat	• One fifth (0.2) of a gra metric carat or MC).	am (often defined as a	Reported	as carats.	
Sample grade	 the context of carats p volume. The sample grade abo off sieve size should b metric tonne and/or c tonnes. For alluvial de quoted in carats per si cubic metre are accept volume to weight basi In addition to general volume and density th frequency (stones per 	quare metre or carats per table if accompanied by a is for calculation. requirements to assess here is a need to relate stone cubic metre or tonne) to stone) to derive sample	 below: The volum loader buc stockpile v factor prev 	ne processed is ba kets fed to the p volumes using ar viously reconciled	nmarised in the table ased on counted plant, converted to m ³ n established bucket d to surveyed broken easured in metres
	Sample ID	Volume Processed m ³	Diamonds recovered	Total carats	
	1014/01	2 104	0	0	
	L014/01 L047/01	2,184	0	0	
	L367/01	1,061 529	0	0	
	L367/01	927	0	0	
	L218/01	1,322	0	0	



Reporting of Exploration Results	 Complete set of sieve data using a standard progression of sieve sizes per facies. Bulk sampling results, global sample grade per facies. Spatial structure analysis and grade distribution. Stone size and number distribution. Sample head feed and tailings particle granulometry. Sample density determination. Per cent concentrate and undersize per sample. Sample grade with change in bottom cut-off screen size. Adjustments made to size distribution for sample plant performance and performance on a commercial scale. If appropriate or employed, geostatistical techniques applied to model stone size, distribution of fequency from size distribution of exploration diamond samples. The weight of diamonds may only be omitted from the report when the diamonds are considered too small to be of commercial significance. This lower cut-off size should be stated. 	 Sample results are reported in the table above. The sample grade is reported on all diamonds recovered with a nominal bottom cut-off screen size on the plant of 1.5mm. No modelling or grade adjustments have been made to the grade calculations. No geostatistical techniques have been applied at this stage of sampling.
Grade estimation for reporting Mineral Resources and Ore Reserves	 Description of the sample type and the spatial arrangement of drilling or sampling designed for grade estimation. The sample crush size and its relationship to that achievable in a commercial treatment plant. Total number of diamonds greater than the specified and reported lower cut-off sieve size. Total weight of diamonds greater than the specified and reported lower cut-off sieve size. The sample grade above the specified lower cut-off sieve size. 	 No diamond resources are reported. No diamond reserves are reported.
Value estimation	 Valuations should not be reported for samples of diamonds processed using total liberation method, which is commonly used for processing exploration samples. To the extent that such information is not deemed commercially sensitive, Public Reports should include: diamonds quantities by appropriate screen size per facies or depth. details of parcel valued. number of stones, carats, lower size cut-off per facies or depth. The average \$/carat and \$/tonne value at the selected bottom cut-off should be reported in US Dollars. The value per carat is of critical importance in demonstrating project value. The basis for the price (e.g. dealer buying price, dealer selling price, etc.). An assessment of diamond breakage. 	No diamond value estimates are reported.



Security and integrity	 Accredited process audit. Whether samples were sealed after excavation. Valuer location, escort, delivery, cleaning losses, reconciliation with recorded sample carats and number of stones. Core samples washed prior to treatment for micro diamonds. Audit samples treated at alternative facility. Results of tailings checks. Recovery of tracer monitors used in sampling and treatment. Geophysical (logged) density and particle density. Cross validation of sample weights, wet and dry, with hole volume and density, moisture factor. 	 There has been no accredited process audit. Samples were continuously monitored by mine security personnel and Angolan State diamond security personnel during transport and storage. Microdiamonds were not processed. No audit samples were collected because of the nature of the samples. Tailings have not been checked for indicators. Geophysical densities were not determined. Cross validation of weights with pit volume and density is not considered necessary for the stage of exploration.
Classification	• In addition to general requirements to assess volume and density there is a need to relate stone frequency (stones per cubic metre or tonne) to stone size (carats per stone) to derive grade (carats per tonne). The elements of uncertainty in these estimates should be considered, and classification developed accordingly.	• No resource is classified in this report.